



接线图  
Wiring Diagram



规格 SPECIFICATIONS

1	相数 Number of Phase	2
2	步距角 Step Angle	1.8° ±5%
3	保持力矩 Holding Torque	68 Kg.cm
4	电压 Voltage	3.25 VDC
5	电流 Current	5.0 A
6	相电阻 Phase Resistance (20°C)	0.65 ±10% Ω
7	相电感 Phase Inductance (1KHz)	3.6 ±20% mH
8	转子惯量 Rotor Inertia	3550 g · cm <sup>2</sup>
9	绝缘电阻 Insulation Resistance	100M Ω 500VDC
10	绝缘等级 Insulation Class	B ( 130°C )
11	环境温度 Ambient Temperature	-20°C to 50°C
12	环境湿度 Ambient Humidity	15% to 95%
13	电机重量 Motor Weight	Approx 3.8 kg
14		

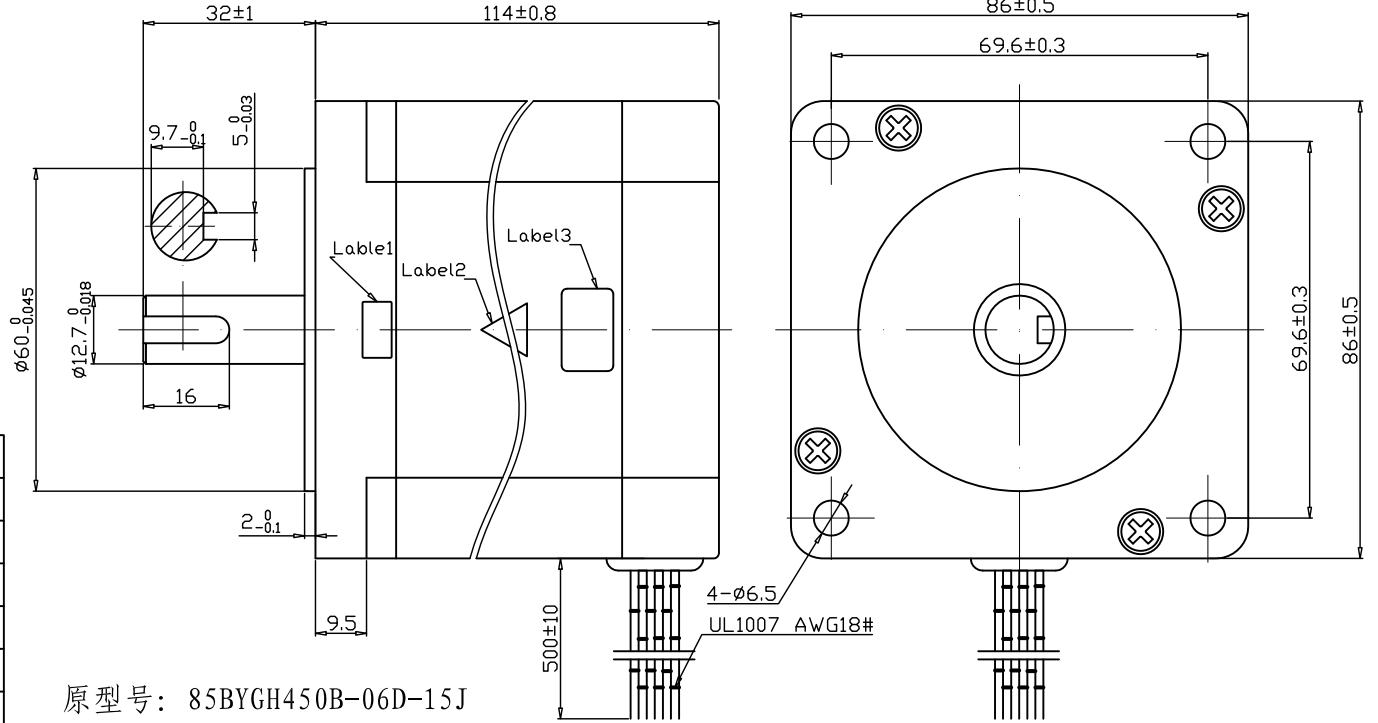

原型号: 85BYGH450B-06D-15J  
三种标签都贴在引出线端面。

励磁顺序 (2相励磁)

EXITING SEQUENCE (2 PHASE)

STEP	A	B	$\bar{A}$	$\bar{B}$	CCW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	↓



Label 1



Label 2



Label 3

NOTE: This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. Unless otherwise specified all trademarks and registered trademarks appearing on this document are the property of Changzhou Chuangwei Motor & Electric Apparatus Co., Ltd.

			Unit:mm 第一角画法 First angle method 未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1:m	设计 DESIGN	xie	20150309	CW-motor 	常州创伟电机电器有限公司 Changzhou Chuangwei Motor & Electric Apparatus Co., Ltd		
			未注形状与位置尺寸公差 Geometrical tolerances for features without individual tolerance indications GB/T 1184-k eqv ISO 2768-2:k	校核 CHECK	XH	20160713				
6	V3.1	贴三种标签	20160713	工艺 TECHNOLOGY			TYPE: HYBRID STEPPING MOTOR	SCALE XX	Rev. 3.1	SHEET 1 OF 1
	V3.0	调整参数	20151226	标准化 STANDARD			Model: 86BHH114-500A-32E			
	V2.1	换版面	20150309	批准 APPROVE						
	V2.0	xxx	20131203	NAMES	SINGATURE	DATE				
	REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIDE						